

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 786 805 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

30.07.1997 Bulletin 1997/31

(51) Int. Cl.⁶: H01L 21/321, H01L 21/3205

(21) Application number: 97101134.1

(22) Date of filing: 24.01.1997

(84) Designated Contracting States:

DE FR GB IT NL

(30) Priority: 26.01.1996 JP 11481/96

(71) Applicant: MATSUSHITA ELECTRONICS CORPORATION

Takatsuki-shi, Osaka 569 (JP)

(72) Inventors:

- Nakagawa, Satoshi
- Takaoka-shi, Toyama 933 (JP)

• Ito, Toyoji

Kusatsu-shi, Shiga 525 (JP)

• Bito, Yoji

Toyama-shi, Toyama 930 (JP)

• Nagano, Yoshihisa


Suita-shi, Osaka 565 (JP)

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Method of plasma etching a film made of one of a ferroelectric material, high dielectric constant material or platinum

(57) A device insulating film, a lower-layer platinum film, a ferroelectric film, an upper-layer platinum film, and a titanium film are sequentially formed on a semiconductor substrate in this order. On the titanium film, a photoresist mask is further formed in a desired pattern. The thickness of the titanium film is adjusted to be 1/10 or more of the total thickness of a multilayer film consisting of the upper-layer platinum film, the ferroelectric film, and the lower-layer platinum film. The titanium film is then subjected to dry etching and the photoresist film is removed by ashing process. The titanium film thus patterned is used as a mask in etching the upper-layer platinum film, the ferroelectric film, and the lower-layer platinum film by a dry-etching method using a plasma of a gas mixture of chlorine and oxygen in which the volume concentration of oxygen gas is adjusted to be 40%. During the dry-etching process, the titanium film is oxidized to provide a high etching selectivity. Subsequently, the titanium film is removed by dry etching using a plasma of chlorine gas.

FIG. 1(a)



Description

BACKGROUND OF THE INVENTION

The present invention relates to a method of manufacturing semiconductor devices and, more particularly, to a method of etching a ferroelectric material, a high dielectric constant material, and platinum.

There has been known a non-volatile memory utilizing spontaneous polarization in a ferroelectric film formed on a semiconductor substrate. There has also been known a DRAM (dynamic RAM) comprising a capacitor formed of a high dielectric constant material on a semiconductor substrate. In the process of manufacturing these types of memories, the technology of micro-fabrication is required to process a ferroelectric material, a high dielectric constant material, and platinum (Pt) used in the electrodes of the memories.

There is a well-known method of processing a ferroelectric material or a high dielectric constant material by dry etching using a photoresist as a mask and a plasma of chlorine (Cl_2) gas. However, since each of the ferroelectric material and high dielectric constant material is an oxide compound of metal having a high melting point and a high boiling point, the etching rate thereof is low. To achieve a sufficient selectivity, therefore, the photoresist mask conventionally used in the method should have a considerable thickness, which has rendered micro-fabrication difficult.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to implement easy micro-fabrication of a ferroelectric material, a high dielectric constant material, and platinum.

To achieve the above object, the present invention provides a method wherein a mask is formed from a metal film likely to be oxidized which has been deposited and patterned on a film to be etched made of at least one of a ferroelectric material, a high dielectric constant material, and platinum. The film to be etched is then etched by using a plasma of a mixture of halogen gas and oxygen gas. In accordance with the method, the metal film formed as the mask is oxidized by the plasma, resulting in a lower etching rate for the mask. By contrast, a higher etching rate is achieved for the film to be etched. Hence, a higher selectivity is obtained to allow easier micro-fabrication of the film to be etched.

The present invention also provides a method wherein lower-layer and upper-layer masks are formed from an insulating material and a metal likely to be oxidized which have been deposited in this order and patterned on a film to be etched made of at least one of a ferroelectric material and a high dielectric constant material. The film to be etched is then etched by using a plasma of a mixture of halogen gas and oxygen gas and, thereafter, the upper-layer mask is removed while the lower-layer mask is left as it is. In accordance with

the method, the metal film formed as the upper-layer mask is oxidized by the plasma, resulting in a lower etching rate for the mask. By contrast, a higher etching rate is achieved for the film to be etched. Hence, a higher selectivity is obtained to allow easier micro-fabrication of the film to be etched. Moreover, since the film to be etched is covered with the lower-layer mask during the removal of the upper-layer mask, the film to be etched is not exposed to the etching gas, which suppresses variations in ferroelectric property or high dielectric constant property and degradation thereof. To prevent a residue of the upper-layer mask from being produced, a reducing gas plasma, e.g., a plasma of boron trichloride is used to etch the upper-layer mask.

The present invention also provides a method wherein a mask is formed from an insulating material which has been deposited and patterned on a film to be etched made of at least one of a ferroelectric material and a high dielectric constant material. The film to be etched is then selectively etched by using a gas plasma and, thereafter, only an upper-layer portion of the mask made of the insulating material is removed. In accordance with the method, easier micro-fabrication of the film to be etched is implemented by adopting a dry-etching method using the mask made of the insulating material, compared with the case of using a photoresist mask. Moreover, since the mask is partially removed, the film to be etched is protected during the removal of the mask, which suppresses variations in ferroelectric property or high dielectric constant property and degradation thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1(a) to 1(e) are cross-sectional views illustrating a process by a method of manufacturing semiconductor devices according to the present invention;

FIG. 2 shows individual relationships between the volume concentration of oxygen gas in a gas mixture of chlorine and oxygen and respective etching rates for platinum, a ferroelectric material, and titanium when dry etching using a plasma of the gas mixture is performed with respect thereto;

FIGS. 3(a) to 3(d) are cross-sectional views illustrating another process by the method of manufacturing semiconductor devices according to the present invention;

FIG. 4 shows individual relationships between the pressure inside a chamber and respective etching rates for titanium and titanium oxide when dry etching using a plasma of boron trichloride gas is performed with respect thereto; and

FIGS. 5(a) to 5(d) are cross-sectional views illustrating still another process by the method of manufacturing semiconductor devices according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Specific embodiments of a method of manufacturing semiconductor devices according to the present invention will be described with reference to the drawings.

FIGS. 1(a) to 1(e) illustrate the method of manufacturing semiconductor devices according to the present invention, in which are shown: a semiconductor substrate 1 made of single-crystal silicon (Si); a device insulating film 2 made of silicon oxide (SiO_2); a lower-layer platinum (Pt) film 3; a ferroelectric film 4 made of SBT as $\text{SrBi}_2\text{Ta}_3\text{O}_9$; an upper-layer platinum (Pt) film 5; a titanium (Ti) film 6; and a photoresist mask 7.

The manufacturing method is implemented by sequentially forming the device insulating film 2, the lower-layer platinum film 3, the ferroelectric film 4, the upper-layer platinum film 5, and the titanium film 6 on the semiconductor substrate 1 in this order. On the titanium film 6, the photoresist mask 7 is further formed in a desired pattern by photolithography (FIG. 1(a)). The device insulating film 2 is formed by CVD. The lower-layer platinum film 3, the upper-layer platinum film 5, and the titanium film 6 are formed by sputtering. The ferroelectric film 4 is formed by sol-gel process (specifically, by spin coating or mist process). The respective thicknesses of the device insulating film 2, lower-layer platinum film 3, ferroelectric film 4, upper-layer platinum film 5, titanium film 6, and photoresist mask 7 are, e.g., 200 nm, 300 nm, 200 nm, 200 nm, 200 nm, and 1200 nm. In this case, the thickness of the titanium film 6 is adjusted to be 1/10 or more of the total thickness of a multilayer film consisting of the upper-layer platinum film 5, the ferroelectric film 4, and the lower-layer platinum film 3.

The titanium film 6 is then subjected to dry etching using a plasma of chlorine (Cl_2) gas (FIG. 1(b)), followed by the removal of the photoresist film 7 by ashing process using an oxygen (O_2) plasma. (FIG. 1(c)).

Subsequently, the multilayer film consisting of the upper-layer platinum film 5, the ferroelectric film 4, and the lower-layer platinum film 3 is subjected to dry etching using the patterned titanium film 6 as a mask and a plasma of a gas mixture of chlorine (Cl_2) and oxygen (O_2) (FIG. 1(d)). The dry-etching process is performed in a dedicated chamber, in which the respective flow rates of the chlorine gas and oxygen gas are adjusted to be 12 cc/minute and 8 cc/minute, the internal pressure is held at 2 Pa, and RF power of 13.56 MHz is applied to the gas mixture at a density of 5 W/cm², thereby generating the plasma of the gas mixture of chlorine and oxygen. In this case, the volume concentration of the oxygen gas in the mixture gas of chlorine and oxygen is 40%.

Furthermore, the titanium film 6 is removed by dry etching using a plasma of chlorine gas (FIG. 1(e)). During the dry-etching process, the flow rate of the chlorine gas is adjusted to be 30 cc/minute, the pressure inside the chamber is held at 20 Pa, and RF power of 13.56

MHz is applied to the chlorine gas at a density of 0.7 W/cm², thereby generating the plasma of the chlorine gas. The foregoing steps are for forming a ferroelectric capacitor on the semiconductor substrate 1 with the device insulating film 2 interposed therebetween. After the step illustrated in FIG. 1(e), there is performed a wiring step (not shown).

FIG. 2 shows individual relationships between the volume concentration of oxygen gas in a gas mixture of chlorine and oxygen and respective etching rates for platinum, a ferroelectric material, and titanium when dry etching using the plasma of the gas mixture is performed with respect thereto, in which the horizontal axis represents the volume concentration of the oxygen gas in the gas mixture of chlorine and oxygen and the vertical axis represents the respective etching rates for platinum, the ferroelectric material, and titanium. The individual etching rates are indicated relative to an etching rate for platinum when the volume concentration of the oxygen gas is 0% (i.e., the volume concentration of the chlorine gas is 100%). The plasma for etching is generated by holding the pressure inside the chamber at 2 Pa and applying RF power of 13.56 MHz to the gas mixture at a density of 5 W/cm².

From FIG. 2., it will be understood that the etching rate for titanium is drastically reduced when the volume concentration of the oxygen gas becomes 27% or more. This is because titanium has been oxidized by the plasma and hence is less likely to be etched. If the volume concentration of the oxygen gas is adjusted to be 30% or more, the etching rate for titanium becomes 1/10 or less of the etching rates for platinum and the ferroelectric material. The thickness of the titanium film 6 is adjusted to be 1/10 or more of the total thickness of the multilayer film consisting of the upper-layer platinum film 5, the ferroelectric film 4, and the lower-layer platinum film 3 as described above, and consequently the unwanted portions of the films 3 to 5 stacked in layers can be etched away, while the patterned titanium film 6 and the wanted portions of the underlying films 3 to 5 stacked in layers are left, as shown in FIG. 1(d).

Thus, according to the present method, the films 3 to 5 stacked in layers are selectively etched by using the titanium film 6 formed and patterned as a mask on the films 3 to 5 made of platinum and the ferroelectric material and by using the plasma of the mixture gas of chlorine and oxygen, resulting in an improved accuracy with which the films 3 to 5 stacked in layers are processed. Moreover, since the photoresist mask 7 is used only for patterning the titanium film 6, the thickness of the photoresist mask 7 can be reduced, which contributes to improved resolution and improved tolerance for a focal depth in an optical system for photolithography. With these advantages, various ferroelectric materials which have remained to be used because of their poor processability become usable, thereby improving the characteristics, reliability, and production yield of a semiconductor device. Alternatively, a titanium layer, a titanium nitride layer, or a titanium oxide layer may be

interposed as an adhesion layer between the device insulating film 2 and the lower-layer platinum film 3. It is also possible to interpose a similar adhesion layer between the upper-layer platinum film 5 and the titanium film 6 so that the adhesion layer remaining even after the removal of the titanium film 6 ensures adhesion of the upper-layer platinum film 5 to the oxide silicon film formed after the step illustrated in FIG. 1(e).

As is apparent from FIG. 2, the film to be etched is not limited to such a multilayer film of Pt and SBT as described above. A high selectivity is also exhibited to a single-layer film of Pt or SBT. The present method is also applicable to the etching of a PZT as PbTiO_3 - PbZrO_3 film which is a ferroelectric film or to the etching of a BST as BaTiO_3 - SrTiO_3 film which is a high dielectric constant film. Although the foregoing embodiment has used the titanium (Ti) film as the mask, a mask made of a titanium compound or an alloy containing titanium may be used instead. Alternatively, a mask made of another metal likely to be oxidized such as chromium (Cr), tantalum (Ta), or aluminum (Al) may be used instead. In place of the gas mixture of Cl_2 and O_2 , a gas mixture of another halogen gas such as HBr , SF_6 , or HCl and O_2 may be used as the etching gas. However, since a chloride of platinum (Pt) is higher in vapor pressure than a fluoride of Pt, a chlorine-based gas is preferred to a fluorine-based gas in etching Pt.

As described above, the ferroelectric capacitor has a structure in which the ferroelectric film is interposed between the upper and lower platinum films. To prevent surface leakage on a side face of the ferroelectric film during the use of the resulting semiconductor device, the area of the upper-layer platinum film is preferably smaller than the area of the ferroelectric film. A description will be given below to an etching process of the ferroelectric film and the lower-layer platinum film which is separately performed from an etching process of the upper-layer platinum film.

FIGS. 3(a) to 3(d) illustrate another process by the method of manufacturing semiconductor devices according to the present invention, in which are shown: a semiconductor substrate 11 made of single-crystal silicon (Si); a device insulating film 12 made of silicon oxide (SiO_2); a lower-layer platinum (Pt) film 13; a ferroelectric film 14 made of SBT as $\text{SrBi}_2\text{Ta}_3\text{O}_9$; an upper-layer platinum (Pt) film 15; a mask insulating film 16 made of NSG (non-doped silicate glass) which is a silicon oxide (SiO_2); and a titanium (Ti) film 17.

The manufacturing method is implemented by sequentially forming the device insulating film 12, the lower-layer platinum film 13, the ferroelectric film 14, and the upper-layer platinum film 15 on the semiconductor substrate 11 in this order, followed by the etching of the upper-layer platinum film 15 into a desired pattern (FIG. 3(a)). The device insulating film 12 is formed by CVD. The lower-layer and upper-layer platinum films 13 and 15 are formed by sputtering. The ferroelectric film 14 is formed by sol-gel process (specifically, by spin coating or mist process). The respective thicknesses of

the device insulating film 12, the lower-layer platinum film 13, the ferroelectric film 14, and the upper-layer platinum film 15 are, e.g., 100 nm, 200 nm, 200 nm, and 200 nm. Since only the upper-layer platinum film 15 is etched here, a dry-etching method using a photoresist mask can be applied to the etching. The etching gas is composed of, e.g., chlorine (Cl_2) gas. The photoresist mask is removed by ashing process using an oxygen (O_2) plasma.

Next, the mask insulating film 16 is formed by CVD to cover the patterned upper-layer platinum film 15, followed by the formation of the titanium film 17 by sputtering on the mask insulating film 16. Thereafter, the titanium film 17 and the mask insulating film 16 are etched into a pattern larger than the upper-layer platinum film 15 (FIG. 3(b)). The respective thicknesses of the mask insulating film 16 and the titanium film 17 are, e.g., 100 nm and 200 nm. In this case also, a dry-etching method using a photoresist mask can be applied to the etching. The etching gas for the titanium film 17 is, e.g., a Cl_2 gas and the etching gas for the mask insulating film 16 is, e.g., CF_4 gas. The photoresist mask is removed by ashing process using an oxygen (O_2) plasma.

Subsequently, the ferroelectric film 14 is subjected to dry etching using the patterned titanium film 17 and insulating film 16 as a mask and a plasma of a gas mixture of chlorine (Cl_2) and oxygen (O_2) (FIG. 3(c)). During the dry-etching process, the titanium film 17 is partially changed into titanium oxide (TiO_2).

Furthermore, the titanium film 17 is removed by dry etching using a reducing plasma of boron trichloride (BCl_3) gas, while the insulating film 16 is left as it is (FIG. 3(d)). In this case, the flow rate of boron trichloride is adjusted to be 80 cc/minute, the pressure inside the chamber is held at 13.3 Pa (= 100 mTorr), and RF power of 115 W is applied, thereby generating the plasma of boron trichloride gas. After the step illustrated in FIG. 3(d), there is performed a wiring step (not shown) including perforation of the insulating film 16.

Thus, according to the present method, the titanium film 17 is patterned to form a mask on the ferroelectric film 14 and the ferroelectric film 14 is selectively etched by using the plasma of the gas mixture of chlorine and oxygen, resulting in an improved accuracy with which the ferroelectric film 14 is processed. In addition, the titanium film 17 used as the mask can be removed completely.

FIG. 4 shows individual relationships between the pressure inside a chamber and respective etching rates for titanium and titanium oxide when dry etching using the plasma of the boron trichloride gas is performed with respect thereto. From the drawing, it will be understood that the etching rate for titanium becomes substantially equal to the etching rate for titanium oxide when the pressure is 13.3 Pa. Accordingly, no residue of titanium or titanium oxide is observed when the titanium film 17 is etched under the foregoing conditions so that the wiring step is not hindered. Moreover, since the fer-

roelectric film 14 is covered with the mask insulating film 16 during the removal of the titanium film 17, the ferroelectric film 14 is not exposed to the etching gas, which prevents variations in ferroelectric property and degradation thereof. As a result of an experiment, $15 \mu\text{C}/\text{cm}^2$ is observed as residual paralyzation in the ferroelectric film 14 and the voltage resistance thereof is 30 V. Alternatively, titanium layers, titanium nitride layers, or titanium oxide layers may be interposed as adhesion layers between the device insulating film 12 and the lower-layer platinum film 13 and between the upper-layer platinum film 15 and the mask insulating film 16, respectively.

The present method is also applicable to the etching of a PZT film which is a ferroelectric film and to the etching of a BST film which is a high dielectric constant film. The mask insulating film 16 may also be composed of a silicon nitride (Si_3N_4) film. However, the use of gas containing hydrogen such as ammonia (NH_3) gas in the formation of the silicon nitride film may degrade the ferroelectric film 14, so that a film formation method should be determined carefully. Instead of the titanium film 17, the mask may be composed of a titanium compound, an alloy containing titanium, or another metal likely to be oxidized such as chromium (Cr), tantalum (Ta), or aluminum (Al). Instead of the boron trichloride (BCl_3) gas, another chlorine-based gas such as Cl_2 , CHCl_3 , or HCl may be used to etch the titanium film 17. However, the use of the boron trichloride (BCl_3) gas is most preferred in terms of preventing a residue from being produced. A dry-etching method using the multilayer film of NSG and titanium as a mask is also applicable to the etching of the upper-layer platinum film 15. The upper-layer platinum film 15 may be etched using only the titanium film or NSG film as a mask. It is to be noted that the selectivities with respect to titanium, NSG, and the photoresist are in decreasing order. In the case of using a single-layer mask, therefore, the highest selectivity is exhibited to the mask composed of the titanium film among the masks composed of titanium, NSG, and the photoresist. Alternatively, the ferroelectric film 14 and the lower-layer platinum film 13 may be etched simultaneously.

FIGS. 5(a) to 5(d) illustrate another process by the method of manufacturing semiconductor devices according to the present invention, in which are shown: a semiconductor substrate 21 made of single-crystal silicon (Si); a device insulating film 22 made of silicon oxide (SiO_2); a lower-layer platinum (Pt) film 23; a ferroelectric film 24 made of SBT as $\text{SrBi}_2\text{Ta}_3\text{O}_9$; an upper-layer platinum (Pt) film 25; and a mask insulating film 26 made of NSG.

The manufacturing method is implemented by sequentially forming the device insulating film 22, the lower-layer platinum film 23, the ferroelectric film 24, and the upper-layer platinum film 25 on the semiconductor substrate 21 in this order, followed by the etching of the upper-layer platinum film 25 into a desired pattern (FIG. 5(a)), similarly to the step illustrated in FIG. 3(a).

Next, the mask insulating film 26 is then formed by CVD to cover the patterned upper-layer platinum film 25, which is then etched into a pattern larger than the upper-layer platinum film 25 (FIG. 5(b)). The thickness of the mask insulating film 26 is, e.g., 500 nm. The etching process can be performed by a dry-etching method using a photoresist mask. The etching gas is a fluorine-based gas such as CF_4 or CHF_3 . The photoresist mask is removed by ashing process using an oxygen (O_2) plasma.

Subsequently, the ferroelectric film 24 is subjected to dry etching using the patterned insulating film 26 as a mask and a plasma of a gas mixture of chlorine (Cl_2) and oxygen (O_2) (FIG. 5(c)).

Furthermore, the mask insulating film 26 is partially removed by dry etching using a plasma of fluorine-based gas such as CF_4 or CHF_3 (FIG. 5(d)). The etching time is adjusted such that the thickness of the mask insulating film 26 becomes, e.g., 100 nm. After the step illustrated in FIG. 5(d), there is performed a wiring step (not shown) including perforation of the insulating film 26.

The present method allows easier micro-fabrication of the ferroelectric film 24 by adopting a dry-etching method using the mask insulating film 26 made of NSG. Moreover, since the ferroelectric film 24 is covered with the mask insulating film 26 in the step illustrated in FIG. 5(d), the ferroelectric film 24 is not exposed to the etching gas, which suppresses variations in ferroelectric property and degradation thereof. As a result of an experiment, 13 to $15 \mu\text{C}/\text{cm}^2$ is observed as residual polarization in the ferroelectric film 24 and the voltage resistance thereof is 25 to 30 V. Alternatively, titanium layers, titanium nitride layers, or titanium oxide layers may be interposed as adhesion layers between the device insulating film 22 and the lower-layer platinum film 23 and between the upper-layer platinum film 25 and the mask insulating film 26, respectively.

The present method is also applicable to the etching of a PZT film which is a ferroelectric film and to the etching of a BST film which is a high dielectric constant film. The mask insulating film 26 may be a silicon nitride (Si_3N_4) film. Alternatively, the ferroelectric film 24 and the lower-layer platinum film 23 may be etched simultaneously.

Claims

1. A method of manufacturing semiconductor devices, comprising the steps of:

forming a film to be etched on a semiconductor substrate, said film to be etched being made of at least one of a ferroelectric material, a high dielectric constant material, and platinum;
forming a patterned mask made of a metal likely to be oxidized on said film to be etched;
and
selectively etching said film to be etched by

using an oxidizing and halogenating gas plasma.

comprises the step of selecting a reducing gas plasma of boron trichloride.

2. A method according to claim 1, wherein
said step of forming the mask comprises the
step of forming a film made of at least one of tita- 5
nium, a titanium compound, and an alloy containing
titanium.
3. A method according to claim 1, wherein 10
said step of selectively etching the film to be
etched comprises the step of selecting a plasma of
a gas mixture of chlorine and oxygen.
4. A method according to claim 3, wherein 15
said step of selecting the plasma of the gas
mixture of chlorine and oxygen comprises the step
of adjusting a volume concentration of oxygen gas
in said gas mixture to be 30% or more.
5. A method of manufacturing semiconductor devices, 20
comprising the steps of:

forming a film to be etched on a semiconductor
substrate, said film to be etched being made of 25
at least one of a ferroelectric material and a
high dielectric constant material;
forming a patterned multilayer mask on said
film to be etched, said multilayer mask compris- 30
ing a lower-layer mask made of an insulating
material and an upper-layer mask made of a
metal likely to be oxidized on said lower-layer
mask;
selectively etching said film to be etched by 35
using an oxidizing and halogenating gas
plasma; and
removing said upper-layer mask while leaving
said lower-layer mask.
6. A method according to claim 5, wherein 40
said step of forming the lower-layer mask
comprises the step of forming a film made of silicon
oxide.
7. A method according to claim 5, wherein 45
said step of forming the upper-layer mask
comprises the step of forming a film made of at
least one of titanium, a titanium compound, and an
alloy containing titanium.
8. A method according to claim 7, wherein 50
said step of removing the upper-layer mask
comprises the step of etching said upper-layer
mask by using a reducing gas plasma under such a
condition that titanium and titanium oxide are 55
etched at the same rate.
9. A method according to claim 8, wherein
said step of removing the upper-layer mask

10. A method of manufacturing semiconductor devices,
comprising the steps of:

forming a film to be etched on a semiconductor
substrate, said film to be etched being made of
at least one of a ferroelectric material and a
high dielectric constant material;
forming a patterned mask made of an insulat-
ing material on said film to be etched;
selectively etching said film to be etched by
using a gas plasma; and
removing only an upper-layer portion of said
mask.

11. A method according to claim 10, wherein
said step of forming the mask comprises the
step of forming a film made of silicon oxide.

FIG. 1 (a)

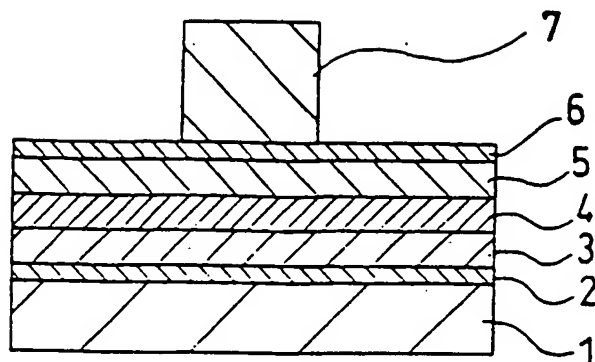


FIG. 1 (b)

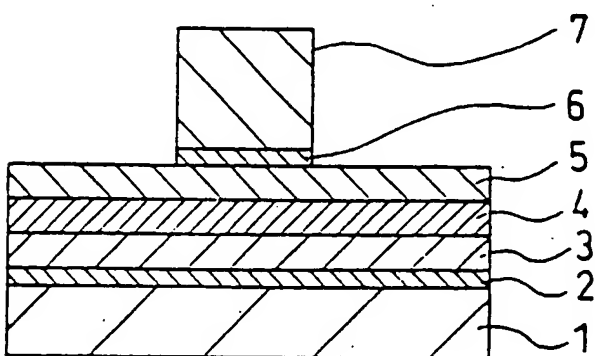


FIG. 1 (c)

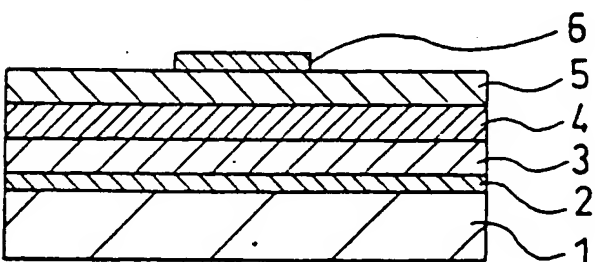


FIG. 1 (d)

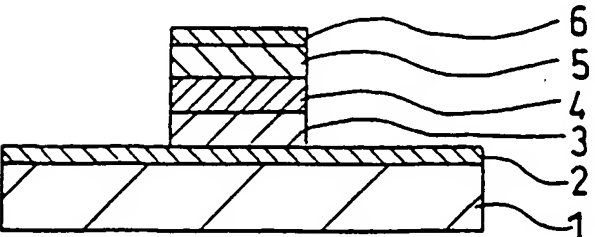


FIG. 1 (e)

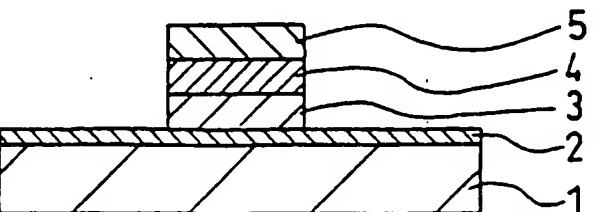


FIG. 2

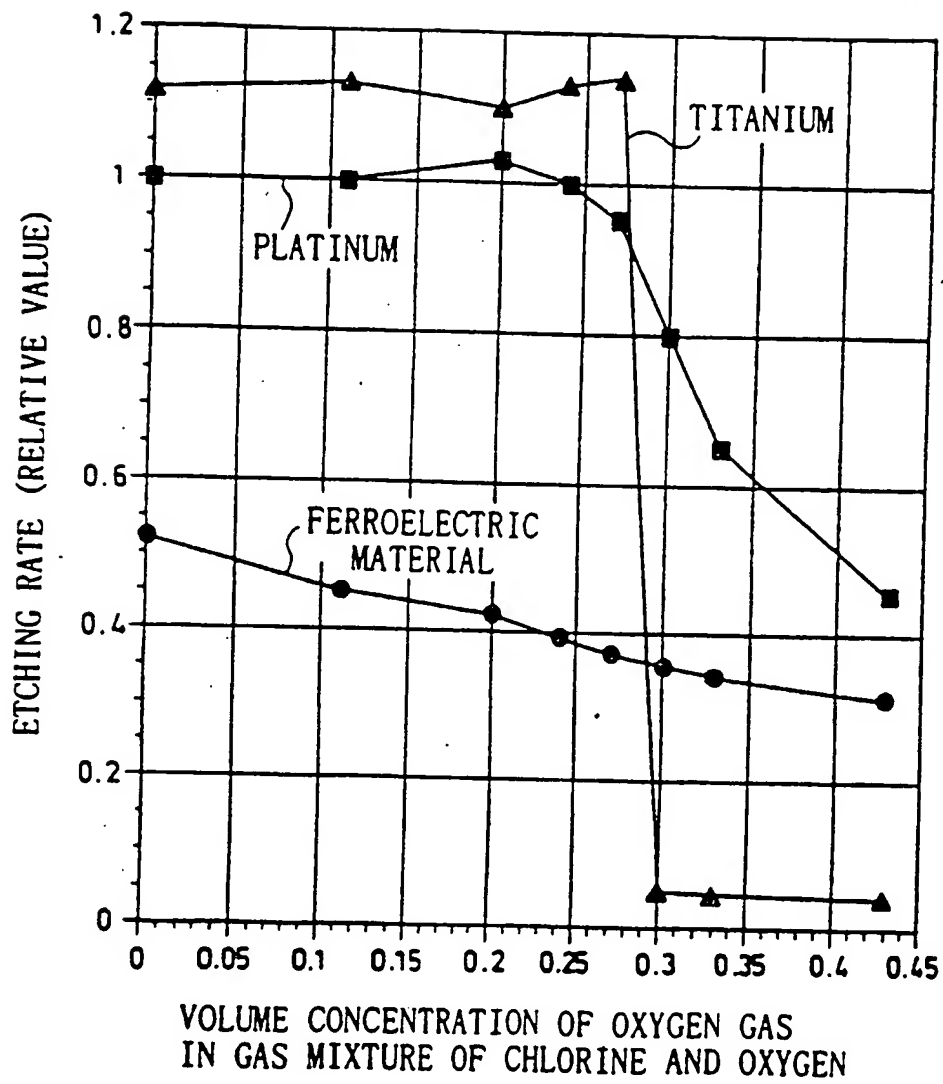


FIG. 3(a)

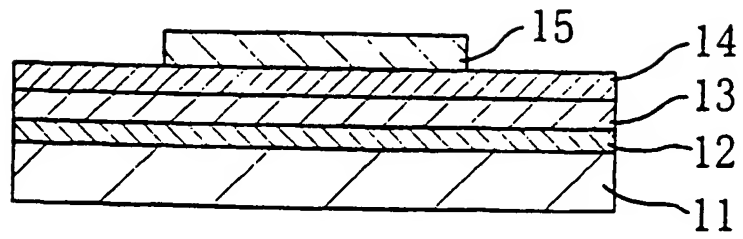


FIG. 3(b)

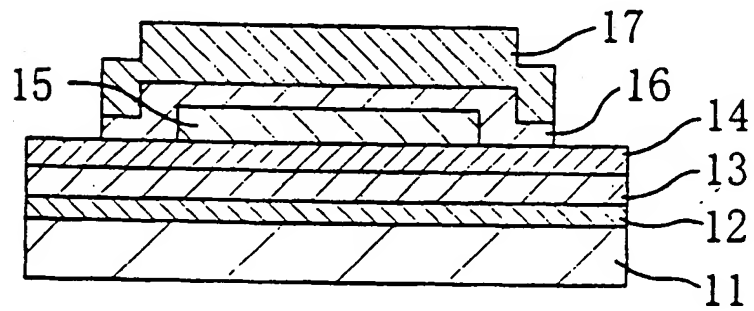


FIG. 3(c)

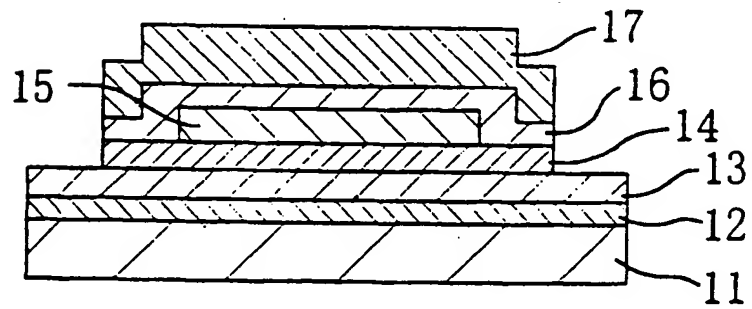


FIG. 3(d)







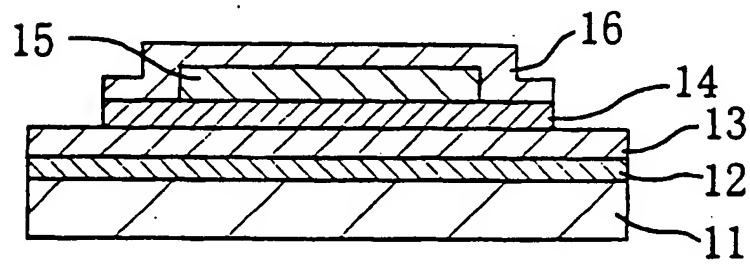


FIG. 4

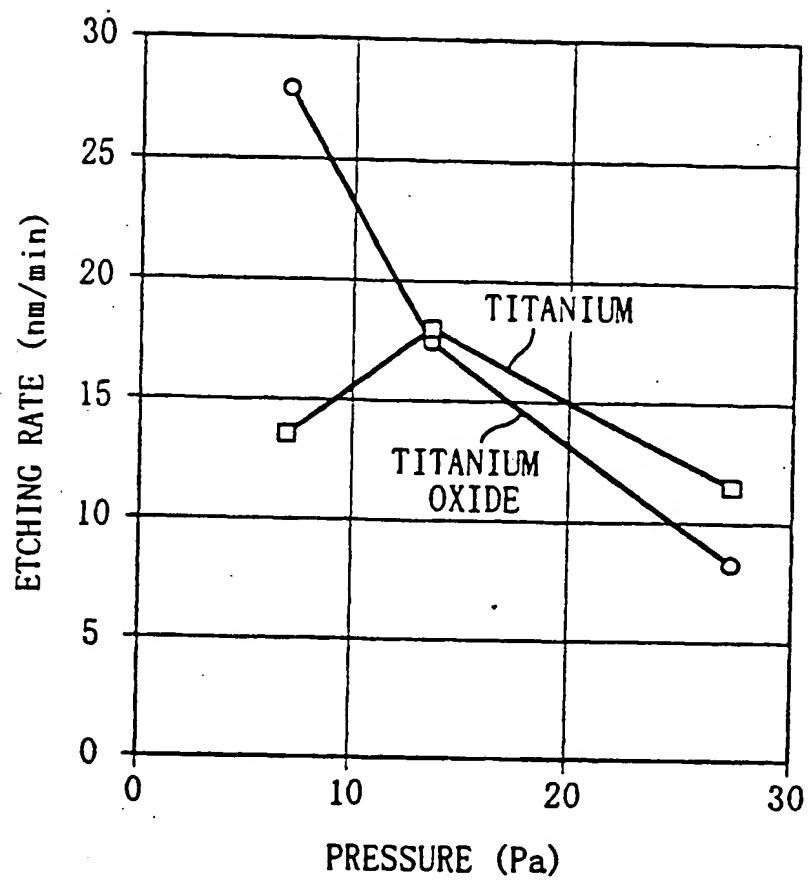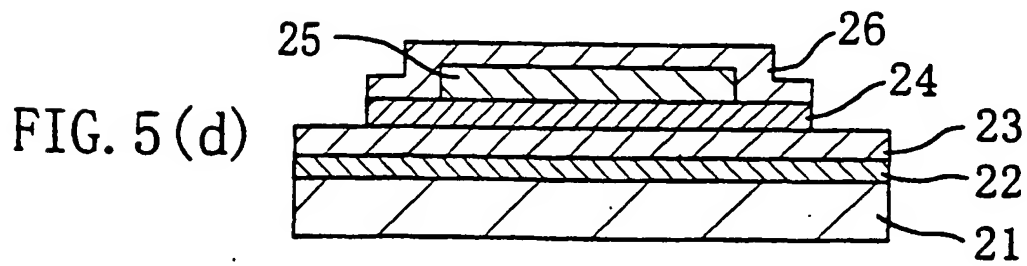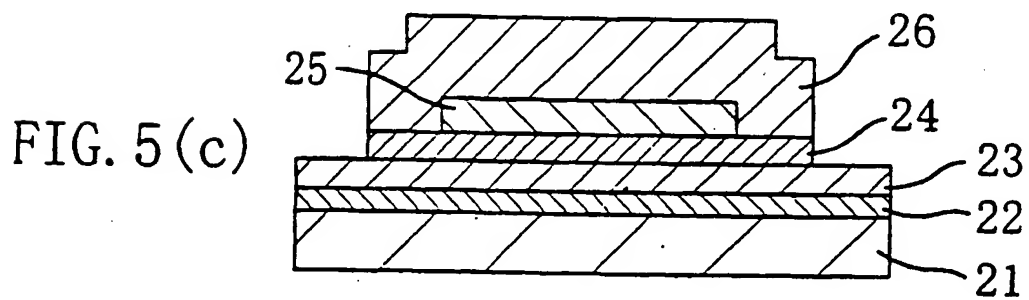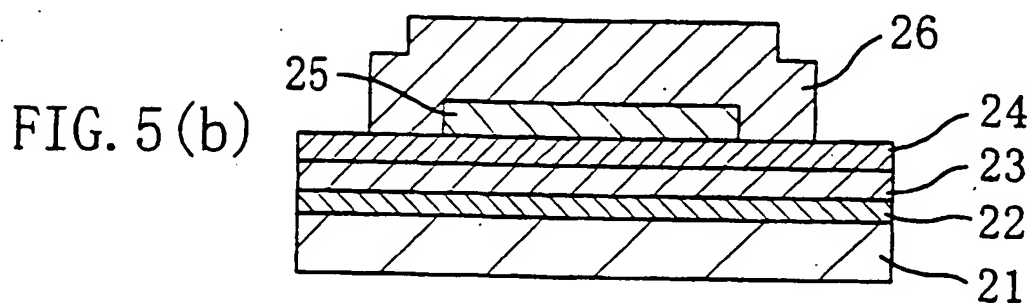

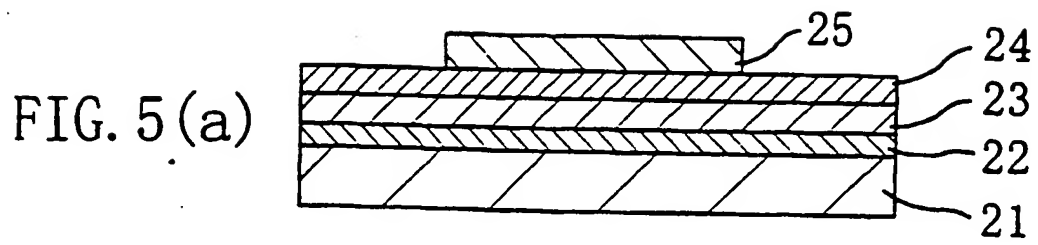



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 786 805 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:

20.08.1997 Bulletin 1997/34

(51) Int. Cl.⁶: H01L 21/321, H01L 21/3205

(43) Date of publication A2:

30.07.1997 Bulletin 1997/31

(21) Application number: 97101134.1

(22) Date of filing: 24.01.1997

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: 26.01.1996 JP 11481/96

(71) Applicant:

MATSUSHITA ELECTRONICS CORPORATION
Takatsuki-shi, Osaka 569 (JP)

(72) Inventors:


• Nakagawa, Satoshi
Takaoka-shi, Toyama 933 (JP)• Ito, Toyoji
Kusatsu-shi, Shiga 525 (JP)
• Bito, Yoji
Toyama-shi, Toyama 930 (JP)
• Nagano, Yoshihisa
Suita-shi, Osaka 565 (JP)(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Method of plasma etching a film made of one of a ferroelectric material, high dielectric constant material or platinum

(57) A device insulating film, a lower-layer platinum film, a ferroelectric film, an upper-layer platinum film, and a titanium film are sequentially formed on a semiconductor substrate in this order. On the titanium film, a photoresist mask is further formed in a desired pattern. The thickness of the titanium film is adjusted to be 1/10 or more of the total thickness of a multilayer film consisting of the upper-layer platinum film, the ferroelectric film, and the lower-layer platinum film. The titanium film is then subjected to dry etching and the photoresist film is removed by ashing process. The titanium film thus pat-

terned is used as a mask in etching the upper-layer platinum film, the ferroelectric film, and the lower-layer platinum film by a dry-etching method using a plasma of a gas mixture of chlorine and oxygen in which the volume concentration of oxygen gas is adjusted to be 40%. During the dry-etching process, the titanium film is oxidized to provide a high etching selectivity. Subsequently, the titanium film is removed by dry etching using a plasma of chlorine gas.

FIG. 1 (a)

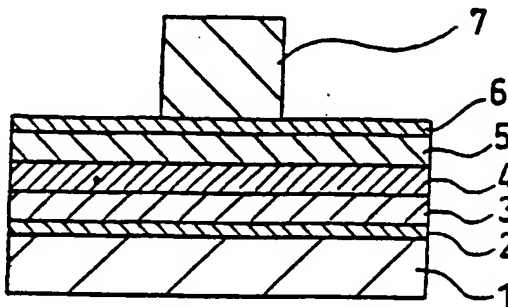



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 10 1134

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 3 975 252 A (FRASER DAVID BRUCE ET AL) 17 August 1976 * column 2, line 30 - column 4, line 28; figures 1-3 * * column 4, line 65 - column 5, line 33; figure 4 * * column 6, line 30 - line 35 * * column 5, line 61 - line 65 *	1,2	H01L21/321 H01L21/3205
Y	---	3-7	
X	INTERNATIONAL CONFERENCE ON SOLID STATE DEVICES AND MATERIALS, 23 August 1994, pages 721-723, XP000543969 SEIICHI YOKOYAMA ET AL: "HIGH TEMPERATURE ETCHING OF PZT/PT/TIN STRUCTURE BY HIGH DENSITY ECR PLASMA" * page 721, paragraph I; figures 1,2 * * page 722, paragraph III-1 - page 723, paragraph III-2; figures 3-7A *	10,11	
Y	---	3-7	
A		1,5	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Y	PATENT ABSTRACTS OF JAPAN vol. 010, no. 119 (P-453), 6 May 1986 & JP 60 247816 A (MITSUBISHI DENKI KK), 7 December 1985, * abstract *	5-7	H01L
A	& JP 60 247 816 A (MITSUBISHI DENKI KK) 7 December 1985 * page 73; table *	1,2,10	

	-/--		
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 27 May 1997	Examiner Klopfenstein, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background U: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document</p>			



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 10 1134

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)	
X	PROCEEDINGS OF THE INTERNATIONAL COLLOQUIUM ON PLASMA PROCESSES, ANTIBES, JUAN LES PINS, JUNE 6 - 11, 1993, no. COLLOQUE 9, 6 June 1993, SOCIETE FRANCAISE DU VIDE, pages 334-339, XP000399274 CHARLET B ET AL: "DRY ETCHING OF PZT FILMS IN AN ECR PLASMA" * page 334, paragraph A * * page 335, paragraph II; figures 1-4 *	10,11		
A	US 3 836 446 A (TIEFERT K) 17 September 1974 * column 1, line 42 - line 62 * * column 3, line 44 - column 4, line 64; figures 2-4 * * column 5, line 24 - line 32 * * column 5, line 46 - column 6, line 12; figure 7 *	1-5,7		
A	US 5 254 217 A (MANIAR PAPU ET AL) 19 October 1993 * column 2, line 30 - line 59; figure 1 * * column 3, line 20 - line 63; figure 2 * * column 4, line 62 - column 5, line 21; figure 3 * * column 5, line 39 - column 6, line 25 * * column 8, line 2 - line 11 *	1-5,7		TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 438 (P-1591), 12 August 1993 & JP 05 089662 A (SEIKO EPSON CORP), 9 April 1993, * abstract * & JP 05 089 662 A (SEIKO EPSON CORP.) 9 April 1993	1,2		
The present search report has been drawn up for all claims				
Place of search BERLIN		Date of completion of the search 27 May 1997	Examiner Klopfenstein, P	
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document</p>				